

THE RATIONALIZATION OF TODAY'S OFFICE



**camera microfilm
simplex**

3400



 **buic®**

camera microfilm simplex

3400

The Buic 3400 is a compact camera designed for the specific requirements of those firms where a single camera is shared by different departments. This camera is extremely versatile, economical and competitive.

THE INTERCHANGEABLE MAGAZINE ▶

The interchangeable Buic magazine enables to use just one microfilm camera for different uses and by several users. The insertion of the film is guided by the track path printed inside the magazine. At any moment it is possible to take out or replace the exposed films. This operation can be carried out in day light conditions.




FEEDER ▶

The automatic feeding device feeds about 3.000 documents of same thickness per hour. It is also possible to adjust the feeder to various paper thicknesses to avoid double document feeds.



Each frame can be coded with a three-level Blip corresponding to a three-level filing system.

Example: cabinet, shelf, folder.

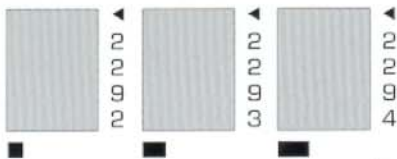

Automatic frame indexing for fast retrieval in CAR systems.

The 3400 camera complies to international security regulations.

TECHNICAL DATA

Max. feeding width	cm. 33,5
Reduction factor	25 X (approx. 2500 DIN A4 documents per film)
Film	16 mm. (30-60 mt. spools)
Lighting	14 lamps, 24 Volts-21W
Frame counter	Resettable
Footage counter	Luminous LED indicator
Film transport	Automatic film advance at beginning and end of film, manual space button for intermediate spacing
Dimensions	25 cm. high, 52 cm. deep, 42 cm. wide
	Electronical checking with self-diagnosis on following operations:
• Film transport	Automatic film advance lamp
• Film end	Film finished
• Magazine	Magazine missing/magazine badly inserted
• Shutter	Shutter not working
• Lamps	Camera stops automatically if a lamp burns out
• Voltage	220V 50Hz 2,5 Amp. Upon request 115V 60Hz 180W
• Weight	28 Kg.

OPTIONALS

- Feeder
- Interchangeable magazine
- Automatic exposure meter
- Three-level Blip - Frame sequential index

FEEDER SPECIFICATIONS

Max. feeding width	cm. 30
Feeding speed	Approx. up to 3.000 A4 documents/h.
Sensibility of thickness control	Approx. up to 1 mm.
Dimensions	15 cm. high, 29 cm. deep, 38 cm. wide
Weight	9 Kg.
Voltage	220/240V, 50Hz, 0,66 Amp.

Specifications subject to change without notice.

buic
SYSTEMS