

2402


microfilm
camera
flow duplex
16 mm.



2402

16 mm. flow duplex microfilm camera with interchangeable magazines

The 2402 camera with interchangeable magazines allows the use of one camera by different departments for separate applications. The built-in automatic feeder plus optional accessories such as endorser, three-level blipping, etc. make this unit particularly useful and flexible for Banks.

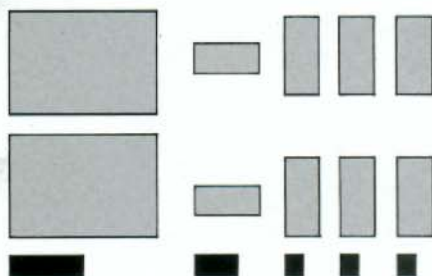

The camera can be equipped with three-level blip for the automatic document retrieval.



The 2402 camera with joint endfeeder allows the feeding of documents to be endorsed and microfilmed in a single passage.

The endorser (dry type) stamps, dates, numbers up to 13 digits (the last 7 sequential) checks, coupons, slip-notes etc. before they are microfilmed. The endorsement can be positioned by the operator.



All controls and alarms are conveniently located on the front of the camera within clear view.

Endorse only without microfilming by pressing contemporary the no-film button and shutter failure button.

Specifications

Max. feeding width:	24 cm.
Reduction factor:	42X (approx. 12.000 checks - 30,5 mt spools)
Film:	unperforated 16 mm. 30,5 mt or 60 mt spools (can be loaded in daylight conditions)
Transport speed:	30.000 checks/hr, 15.000 checks with endorser.
Illumination:	16 lamps, 12 Volts - variable light position; for different film density
Film transport:	automatic film advance at both ends of the film, manual space button for intermediate spacing.
Document counter:	luminous L.E.D. footage indicator.
Timer:	automatic switch-off of the camera.
Warning system:	<ul style="list-style-type: none">• shutter failure, visual & audible• sound film end signal• film advance control, visual & audible• light intensity control• automatic film advance lamp• camera stops automatically if a lamp fuses
Voltage:	220 Volts, 50 Hz, 450 Watt or 115 Volts, 60 Hz
Dimension:	H cm. 35, W cm. 46, D cm. 63
Weight:	Kg. 37 with built-in feeder (+ endorser Kg 1,5) The camera is in conformity with VDE and U.L. regulations.
Optional Accessories:	Endorser Additional magazine Three-level Blip with manual pre-selection of position